


# Characterizing **co-NL** by a Group Action

## GdT Sémantique

Clément Aubert

Joint work with Thomas Seiller (LAMA - Univ. de Savoie)



Institut Galilée - Université Paris-Nord  
99, avenue Jean-Baptiste Clément  
93430 Villetaneuse  
aubert@lipn.fr

October 9, 2012

$$\mathbf{co-NL} = \{ANDPM\} = \{NPPM\} = \{P_+\} = \{P_{\leq 0}\} = \mathbf{co-NL}$$

(A)NDPM                      Observations

$$\mathbf{co-NL} \subseteq \{ANDPM\} \subseteq \{NPPM\} \subseteq \{P_+\} \subseteq \{P_{\leq 0}\} \subseteq \mathbf{co-NL}$$

(A)NDPM                      Observations

$$(\mathfrak{M}_6(\mathfrak{S}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C})) (\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$


$$\underbrace{(\mathfrak{M}_6(\mathfrak{G}) \otimes \overbrace{\mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C})}^{=\mathfrak{D}})}_{\text{Observation}} \underbrace{(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})}_{\text{The input}}$$

## Definition (Observations)

Let  $(\mathfrak{N}_0, \mathfrak{G})$  be a normative pair. An *observation* is an operator  $\phi \in \mathfrak{M}_6(\mathfrak{G}) \otimes \mathfrak{D}$ , where  $\mathfrak{D}$  is a matrix algebra, i.e.  $\mathfrak{D} = \mathfrak{M}_d(\mathbb{C})$  for  $d \in \mathbb{N}$ , called the *algebra of states*.

## Definition (Binary representation of integers)

An operator  $N_n \in \mathfrak{M}_6(\mathfrak{N}_0)$  is a *binary representation* of an integer  $n$  if ...




$$\underbrace{(\mathfrak{M}_6(\mathfrak{G}) \otimes \overbrace{\mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C})}^{=\mathfrak{D}})}_{\text{Observation}} \underbrace{(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})}_{\text{The input}}$$

## Definition (Observations)

Let  $(\mathfrak{N}_0, \mathfrak{G})$  be a normative pair. An *observation* is an operator  $\phi \in \mathfrak{M}_6(\mathfrak{G}) \otimes \mathfrak{D}$ , where  $\mathfrak{D}$  is a matrix algebra, i.e.  $\mathfrak{D} = \mathfrak{M}_d(\mathbb{C})$  for  $d \in \mathbb{N}$ , called the *algebra of states*.

## Definition (Binary representation of integers)

An operator  $N_n \in \mathfrak{M}_6(\mathfrak{N}_0)$  is a *binary representation* of an integer  $n$  if ...



The computation ends if  $\exists k \in \mathbb{N}$  such that

$$(\phi(N_n \otimes 1_o))^k = 0$$

$$(\mathfrak{M}_6(\mathfrak{G}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

### Definition (Normative Pairs)

Let  $\mathfrak{N}_0$  and  $\mathfrak{G}$  be two subalgebras of a von Neumann algebra  $\mathfrak{M}$ . The pair  $(\mathfrak{N}_0, \mathfrak{G})$  is a *normative pair* (in  $\mathfrak{M}$ ) if:

- $\mathfrak{N}_0$  is isomorphic to  $\mathfrak{R}$ ;
- For all  $\Phi \in \mathfrak{M}_6(\mathfrak{G})$  and  $N_n, N'_n \in \mathfrak{M}_6(\mathfrak{N}_0)$  two binary representations of  $n$ ,

$$\Phi N_n \text{ is nilpotent} \Leftrightarrow \Phi N'_n \text{ is nilpotent}$$

$$(\mathfrak{M}_6(\mathfrak{G}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

## Definition (Normative Pairs)

Let  $\mathfrak{N}_0$  and  $\mathfrak{G}$  be two subalgebras of a von Neumann algebra  $\mathfrak{M}$ . The pair  $(\mathfrak{N}_0, \mathfrak{G})$  is a *normative pair* (in  $\mathfrak{M}$ ) if:

- $\mathfrak{N}_0$  is isomorphic to  $\mathfrak{R}$ ;
- For all  $\Phi \in \mathfrak{M}_6(\mathfrak{G})$  and  $N_n, N'_n \in \mathfrak{M}_6(\mathfrak{N}_0)$  two binary representations of  $n$ ,

$$\Phi N_n \text{ is nilpotent} \Leftrightarrow \Phi N'_n \text{ is nilpotent}$$

## Proposition

Let  $\mathfrak{G}$  be the group of finite permutations over  $\mathbb{N}$ ,  $\alpha$  an action of  $\mathfrak{G}$  and for all  $n \in \mathbb{N}$ ,  $\mathfrak{N}_n = \mathfrak{R}$ . The algebra  $(\otimes_{n \in \mathbb{N}} \mathfrak{N}_s) \rtimes_{\hat{\alpha}} \mathfrak{G}$  contains a subalgebra generated by  $\mathfrak{G}$  that we will denote  $\mathfrak{G}$ .

$(\mathfrak{N}_0, \mathfrak{G})$  is a normative pair in  $(\otimes_{n \in \mathbb{N}} \mathfrak{N}_s) \rtimes_{\hat{\alpha}} \mathfrak{G}$  (the type  $II_1$  hyperfinite factor).



$$(\mathfrak{M}_6(\mathfrak{G}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

Definition ( $P_{\geq 0}$  and  $P_+$ )

Let  $(\mathfrak{N}_0, \mathfrak{G})$  be a normative pair,  $(\phi_{i,j})_{0 \leq i, j \leq 6d} \in \mathfrak{M}_6(\mathfrak{G}) \otimes \mathfrak{M}_d(\mathbb{C})$  an observation, we define:

$$[\phi] = \{n \in \mathbb{N} \mid \phi(N_n \otimes 1_o) \text{ is nilpotent}\}$$

An observation is said to be *positive* (resp. *boolean*) when for all  $i, j$ ,

$$\phi_{i,j} = \sum_{l=0}^m \alpha_l \lambda(g_l) \text{ with } \alpha_l \geq 0 \text{ (resp. with } \alpha_l = 1)$$

We then define:

$$P_{\geq 0} = \{\phi \mid \phi \text{ is a positive observation}\}$$

$$P_+ = \{\phi \mid \phi \text{ is a boolean observation}\}$$

$$\{P\} = \{[\phi] \mid \phi \in P\}$$

$$(\mathfrak{M}_6(\mathfrak{S}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

- **Positive or boolean observations**

No interference between the “branches” of the computation.

↪ Non-deterministic computation.

$$(\mathfrak{M}_6(\mathfrak{S}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

- **Positive or boolean observations**

No interference between the “branches” of the computation.

↪ Non-deterministic computation.

- **Nilpotency**

All “branches” must reach 0 for the computation to stop.

↪ Characterization of the complementary of a complexity class.

$$(\mathfrak{M}_6(\mathfrak{S}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

- **Positive or boolean observations**

No interference between the “branches” of the computation.

↪ Non-deterministic computation.

- **Nilpotency**

All “branches” must reach 0 for the computation to stop.

↪ Characterization of the complementary of a complexity class.

- **Crossed product with the group of finite permutations**

Permutations to chose where the bit currently read is stored.

↪ The bit is stored only when the pointer moves.

$$(\mathfrak{M}_6(\mathfrak{S}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

- **Positive or boolean observations**

No interference between the “branches” of the computation.

↔ Non-deterministic computation.

- **Nilpotency**

All “branches” must reach 0 for the computation to stop.

↔ Characterization of the complementary of a complexity class.

- **Crossed product with the group of finite permutations**

Permutations to chose where the bit currently read is stored.

↔ The bit is stored only when the pointer moves.

+ circular input

$$\text{co-NL} \subseteq \{ \text{ANDPM} \} \subseteq \{ \text{NPPM} \} \subseteq \{ P_+ \} \subseteq \{ P_{\leq 0} \} \subseteq \text{co-NL}$$

(A)NDPM                      Observations

### Theorem

A NDPM can decide a **co-NL** complete problem.


## Definition (Non-Deterministic Pointer Machines)

A non-deterministic pointer machine (NDPM) with  $p \in \mathbb{N}$  pointers is a triplet  $M = \{Q, \Sigma, \rightarrow\}$  where

- $Q$  is the set of *states*,  $Q = \{\mathbf{q}_0, \mathbf{q}_1, \dots, \mathbf{q}_e\}$ ;
- $\Sigma = \{0, 1, \star\}$  is the *alphabet*;
- $\rightarrow \subseteq (\Sigma^p \times Q) \times (\wp((P^p \times Q) \setminus \emptyset) \cup \{\mathbf{accept}, \mathbf{reject}\})$  is the binary transition relation.

where  $P$  is the set of instructions:  $P = \{p_i-, \epsilon_i, p_i+ \mid i \in \{1, \dots, p\}\}$ .

- Fixed (constant) number of pointers
- No access to the addresses
- Non-determinist



## Theorem

*There exists a NMDP that decides  $s$ - $t$ -conn-Comp, a **co-NL** complete problem.*

## Definition

Let  $\{\text{NDPM}\}$  (resp.  $\{\text{ANDPM}\}$ ) be the class of sets  $S$  such that there exists a NDPM (resp. an acyclic NDPM) that decides  $S$ .

## Corollary

$$\mathbf{co-NL} \subseteq \{\text{NDPM}\}$$



$$\text{co-NL} \subseteq \{\text{ANDPM}\} = \{\text{NPPM}\} \subseteq \{P_+\} \subseteq \{P_{\leq 0}\} \subseteq \text{co-NL}$$

(A)NDPM                      Observations

### Theorem

*A ANDPM can be encoded in an observation.*

$$(\mathfrak{M}_6(\mathfrak{S}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

### Definition

A *configuration* (resp. a *pseudo-configuration*) is an element of the set  $n^p \times \Sigma^p \times Q$  (resp.  $\Sigma^p \times Q$ ). The set of all possible pseudo-configurations of a NDPM  $M$  is denoted  $c_M$ .

$$(\mathfrak{M}_6(\mathcal{G}) \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C}) \otimes \mathfrak{M}_k(\mathbb{C}))(\mathfrak{M}_6(\mathfrak{N}_0) \otimes \mathfrak{D})$$

## Definition

A *configuration* (resp. a *pseudo-configuration*) is an element of the set  $\mathfrak{n}^p \times \Sigma^p \times Q$  (resp.  $\Sigma^p \times Q$ ). The set of all possible pseudo-configurations of a NDPM  $M$  is denoted  $\mathcal{C}_M$ .

## Proposition (Encoding $M_c$ )

- $\rightarrow^\bullet = \sum_{c \in \mathcal{C}_M} \sum_{t \text{ s.t. } c \rightarrow t} \phi_{c,t}$
- $Q^\bullet$  is in the matrix algebra.
- $P^\bullet$  by means of projections and permutations.
- **accept** $^\bullet = 0$
- **reject** $^\bullet =$  “restore  $M$  with initial pseudo-configuration  $c$ ”

### Definition (Acyclicity)

A NDPM  $M$  is said to be *acyclic* when for all  $c \in C_M$  and all entry  $n \in \mathbb{N}$ ,  $M_c(n)$  halts.

### Lemma

*For all NDPM  $M$  that decides a set  $S$  there exists an acyclic NDPM  $M'$  that decides  $S$ .*

### Definition (Acyclicity)

A NDPM  $M$  is said to be *acyclic* when for all  $c \in C_M$  and all entry  $n \in \mathbb{N}$ ,  $M_c(n)$  halts.

### Lemma

*For all NDPM  $M$  that decides a set  $S$  there exists an acyclic NDPM  $M'$  that decides  $S$ .*

### Theorem

*For any acyclic NDPM  $M$  and pseudo-configuration  $c \in C_M$ , there exists an observation  $M_c^\bullet \in \mathfrak{M}_6(\mathfrak{D}) \otimes \Omega_M$  such that for all  $N_n \in \mathfrak{M}_6(\mathfrak{R}_0)$*

*$M_c(n)$  accepts iff  $M_c^\bullet(N_n \otimes 1_{\Omega_M})$  is nilpotent.*

*Moreover,  $M_c^\bullet \in P_+$ .*

### Proposition

$$\mathbf{co-NL} \subseteq \{\mathbf{ANDPM}\} = \{\mathbf{NDPM}\} \subseteq \{P_+\} \subseteq \{P_{\geq 0}\}$$

$$\text{co-NL} \subseteq \underbrace{\{ANDPM\} = \{NPPM\}}_{(A)NDPM} \subseteq \underbrace{\{P_+\} \subseteq \{P_{\leq 0}\}}_{\text{Observations}} \subseteq \text{co-NL}$$

### Theorem

*A Turing Machine can decide if an observation accepts.*

## Lemma

There exist a morphism  $\Phi$  and two matrices  $M$  and  $\bar{\phi}$  such that  $\Phi(M \otimes 1_{\mathfrak{e}}) = N_n \otimes 1_{\mathfrak{e}}$  and  $\Phi(\bar{\phi}) = \phi$ . So we have  $\phi(N_n \otimes 1_{\mathfrak{e}})$  nilpotent if and only if  $(M \otimes 1_{\mathfrak{e}})\bar{\phi}$  nilpotent.

## Remark

It is equivalent to consider

$$\mathfrak{M}_6(\mathfrak{S}) \otimes \underbrace{\mathfrak{M}_6(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_6(\mathbb{C})}_{p \text{ times}} \otimes \mathfrak{M}_k(\mathbb{C})$$


and

$$\mathfrak{M}_6(\mathbb{C}) \otimes \underbrace{((\mathfrak{M}_{n+1}(\mathbb{C}) \otimes \dots \otimes \mathfrak{M}_{n+1}(\mathbb{C})) \rtimes \mathfrak{S})}_{p \text{ times}} \otimes \mathfrak{e}$$

whose basis contains elements of the form

$$(\pi, \mathbf{a}_1, \dots, \mathbf{a}_p; \sigma; \mathbf{e})$$


$$\bar{\phi}(\pi, \mathbf{a}_1, \dots, \mathbf{a}_p; \sigma; \mathbf{e}) = \sum_{i=0}^L \alpha_i(\rho, \mathbf{a}_{\tau_i(1)}, \dots, \mathbf{a}_{\tau_i(p)}; \tau_i\sigma; \mathbf{e}_i)$$

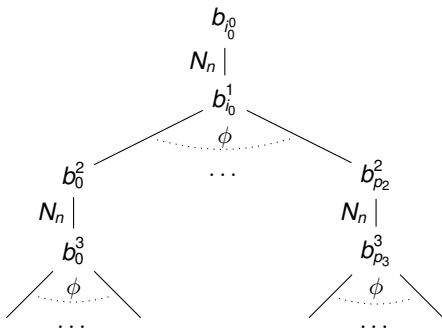

With  $b_i^j$  the elements of the basis encountered.



$$\bar{\phi}(\pi, \mathbf{a}_1, \dots, \mathbf{a}_p; \sigma; \mathbf{e}) = \sum_{i=0}^L \alpha_i(\rho, \mathbf{a}_{\tau_i(1)}, \dots, \mathbf{a}_{\tau_i(p)}; \tau_i \sigma; \mathbf{e}_i)$$

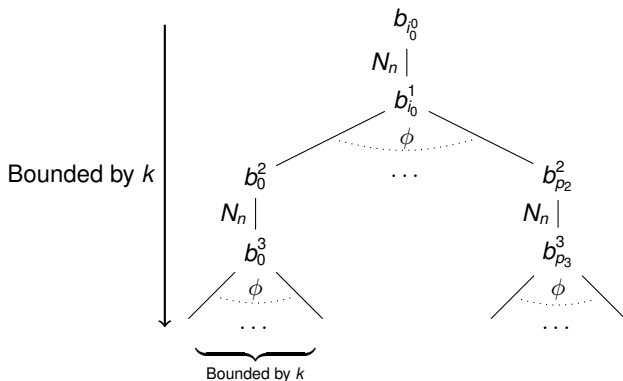

With  $b_i^j$  the elements of the basis encountered and  $k$  the dimensions of the underlying space,  $6(n+1)^p p! d$  where  $d$  is the dimension of  $\mathfrak{E}$ .

$$\text{co-NL} = \underbrace{\{ANDPM\} = \{NPPM\}}_{\text{(A)NDPM}} = \underbrace{\{P_+\} = \{P_{\leq 0}\}}_{\text{Observations}} = \text{co-NL}$$



Jean-Yves Girard.

Normativity in logic.

*Epistemology vs. Ontology*, 2011.



Thomas Seiller.

Interaction graphs: Multiplicatives.

*Annals of Pure and Applied Logic*, 163:1808–1837, December 2012.



Ulrich Schöpp and Martin Hofmann.

Pointer programs and undirected reachability.

In *Electronic Colloquium on Computational Complexity (ECCC)*,  
volume 15, page 090, 2008.

lipn.fr/~aubert/  
aubert@lipn.fr